



N = No. of spacing

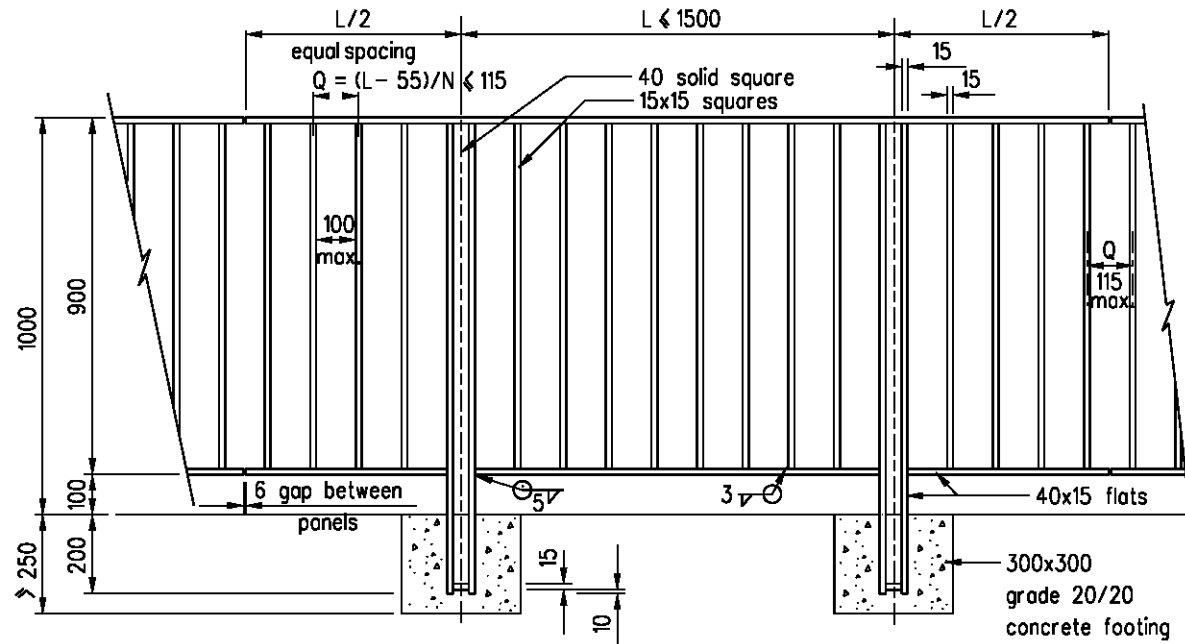

INTERMEDIATE PANEL

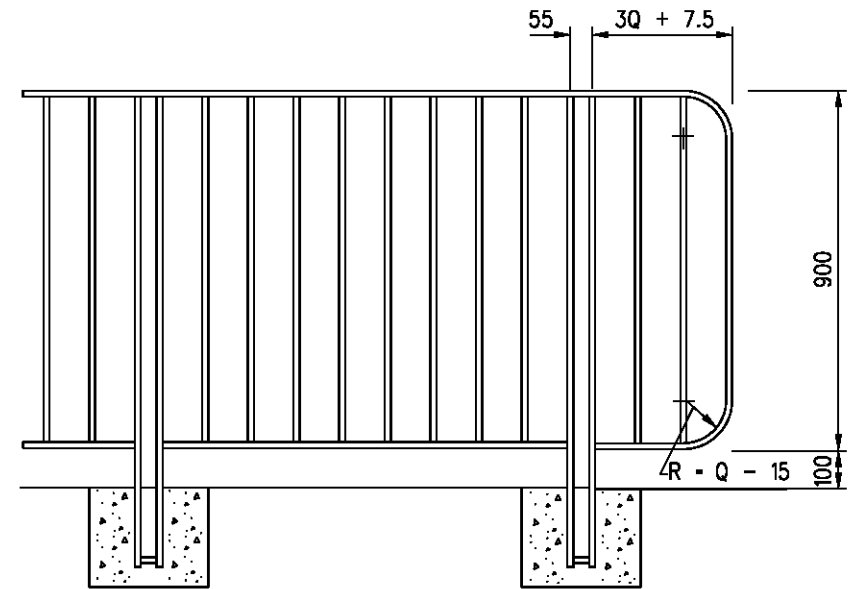

END PANEL

Notes :

1. Dimensions are in millimetres.
2. Steel to be grade 43 B.S. 4360.
3. Railings, nuts, bolts and washers are to be hot dip galvanized to BS EN ISO 1461 : 1999.
4. Welds are to be sound and continuous avoiding locked-in slag.
5. Welding slags are to be removed immediately after welding.
6. Standard railings to be installed either with the top rail 1000mm above the level of the adjacent ground / paved surface or to match the height of existing railings.
7. Where the concrete footing is located in block paved footpath, the footing should be lowered to allow for the paving blocks and the sand course.

B	Note 3 updated		Sep 07
A	Note 7 added		Nov 99
	Former Drg. No. H4007 with general revision		Jun 94
REF.	REVISION	SIGNATURE	DATE

TYPE 1 RAILING

HIGHWAYS DEPARTMENT

REFERENCE	C.E. MANUAL VOL. V CHAPTER 9	DRAWING No.	CAD
SCALE	1 : 20	H 4107B	