


### TRENCH EXCAVATION

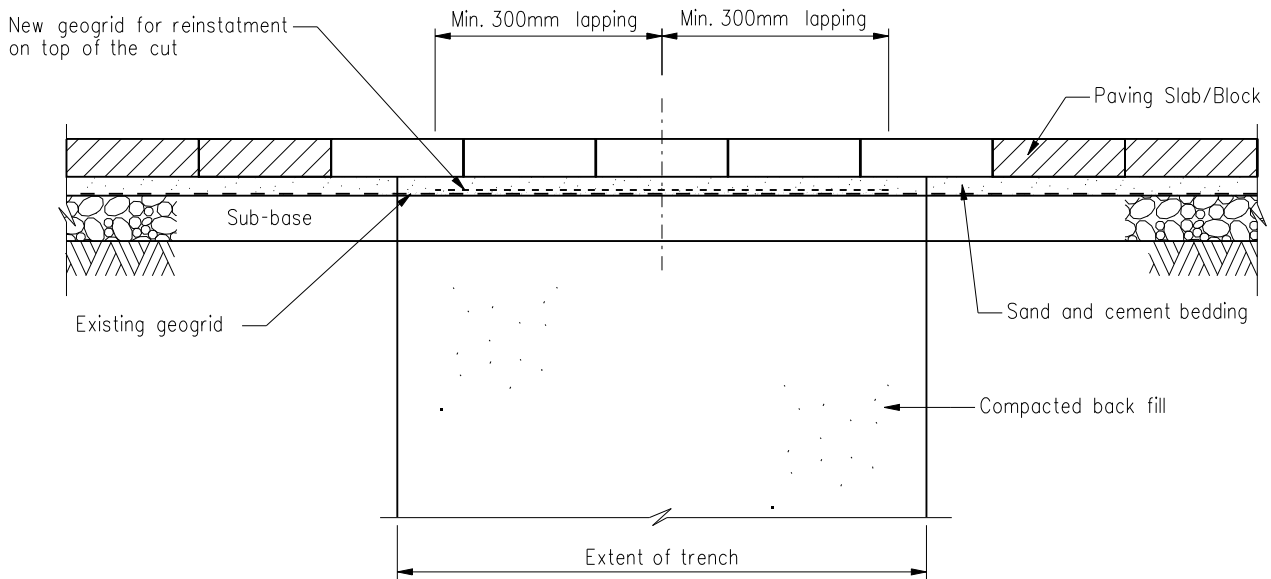

### REINSTATEMENT OF FOOTWAY AFTER TRENCH EXCAVATION

**Notes :**

1. For other details, refer to the latest version of HyD Standard Drawing Nos. H1131 and H5136.
2. Minimum extent of reinstatement shall not be less than that required in the latest version of HyD Standard Drawing No. H1131.
3. Geogrid shall be exposed, folded up and properly protected during trench excavation.

	New Issued		Aug 10
REF.	REVISION	SIGNATURE	DATE

**PERMANENT REINSTATEMENT OF PAVEMENT - BLOCK PAVED FOOTWAY WITH GEOGRID**

**HIGHWAYS DEPARTMENT**

REFERENCE	DRAWING No.	CAD
SCALE Diagrammatic	<b>H 5137</b>	