




STRAIGHT KERBS

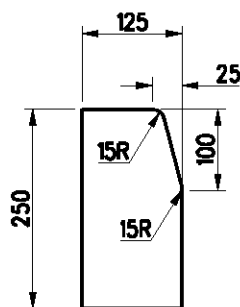

TYPE K1

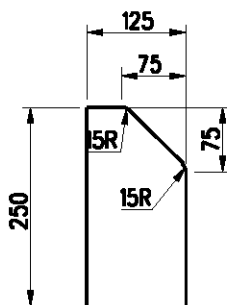


TYPE K2



TYPE K3

RADIUS KERBS

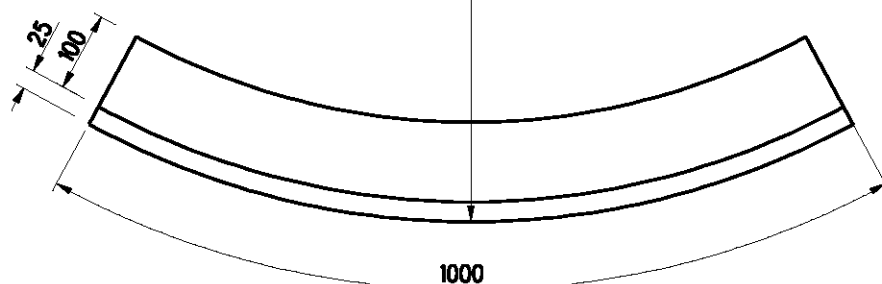


PLAN VIEW

External radius kerbs shall have a radius (R) of 1,3,6 or 9 metres and shall be of kerb type K1 section.


Notes:

1. The nominal length of a kerb unit shall be 1000 mm and an edging unit 750.
2. Concrete shall be grade 30/20.
3. Type K1 kerbs should be used in urban areas and where a footway is adjacent to the carriageway.
4. Type K2 kerbs should be used in rural areas and on high speed roads where there is no adjoining footway.
5. Type K3 kerbs should be used only on bridge decks.
6. Precast concrete kerbs, edgings and quadrants shall comply with B.S. 7263: Part 1 except that the requirement for testing of water absorption shall not be applied.
7. All dimensions are in millimetres.


QUADRANTS

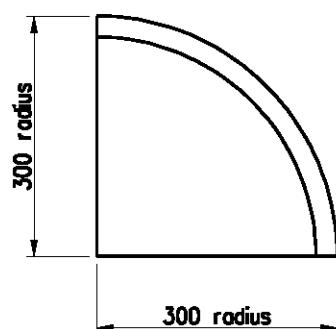


PLAN VIEW

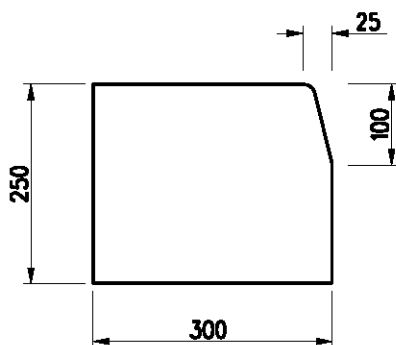


END VIEW



Type E1



Type E2



Type E3

FOOTPATH EDGINGS

PRECAST CONCRETE
KERBS (SHEET 1 OF 2)

Former Drg. No. H1015/1 with general revision		June 94	
REF.	REVISION	SIGNATURE	DATE
REFERENCE		DRAWING No.	CAD
SCALE 1 : 10		H 1118	