




TYPICAL LAYOUT OF BOX-OUT SLAB

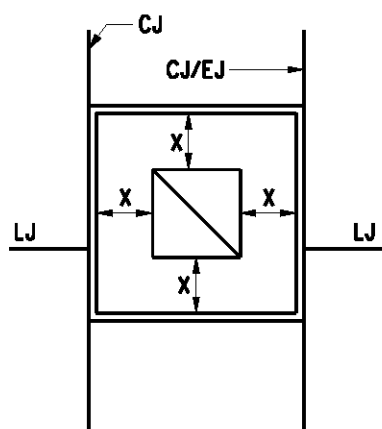


Detail A

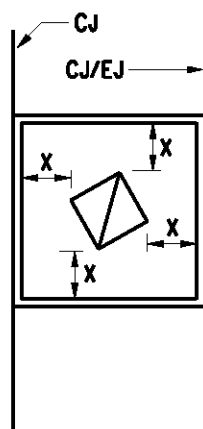

Detail B

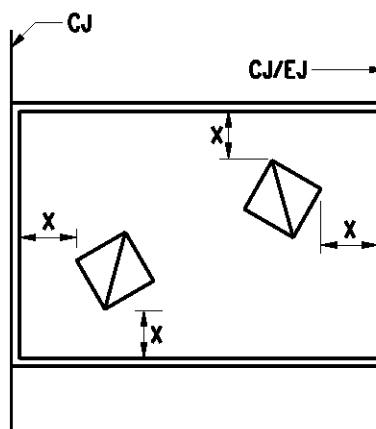

Detail C

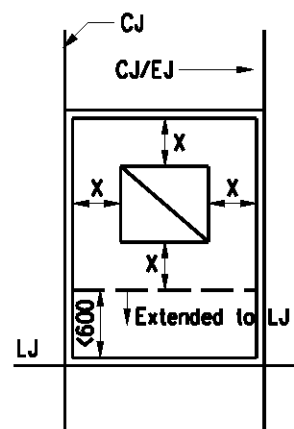

Detail D

OTHER POSSIBLE LAYOUTS

Notes

1. Abbreviation : CJ: contraction joint
EJ: expansion joint
LJ: longitudinal joint
2. Refer to Drg. No. H 1112 for dimension X minimum.
X maximum = X minimum + 600
3. Box-out slab to extend to LJ if width of remaining slab is less than 600 (see detail D)

4. 2 nos. 20 ϕ bars shall be provided for each corner of the manhole cover (see Drg. No. H 1112) in all cases.
5. Fabric reinforcement C636 shall be provided for detail B, C and D.

Former Drg. No. H1006A with general revision		June 94	
REF.	REVISION	SIGNATURE	DATE

**DETAILS OF CONC. ROAD SLAB
AROUND MANHOLES OR
UTILITY PITS (SHEET 1 OF 2)**

HIGHWAYS DEPARTMENT

REFERENCE

DRAWING No.

CAD

SCALE

Diagrammatic

H 1111