


SECTION A - A

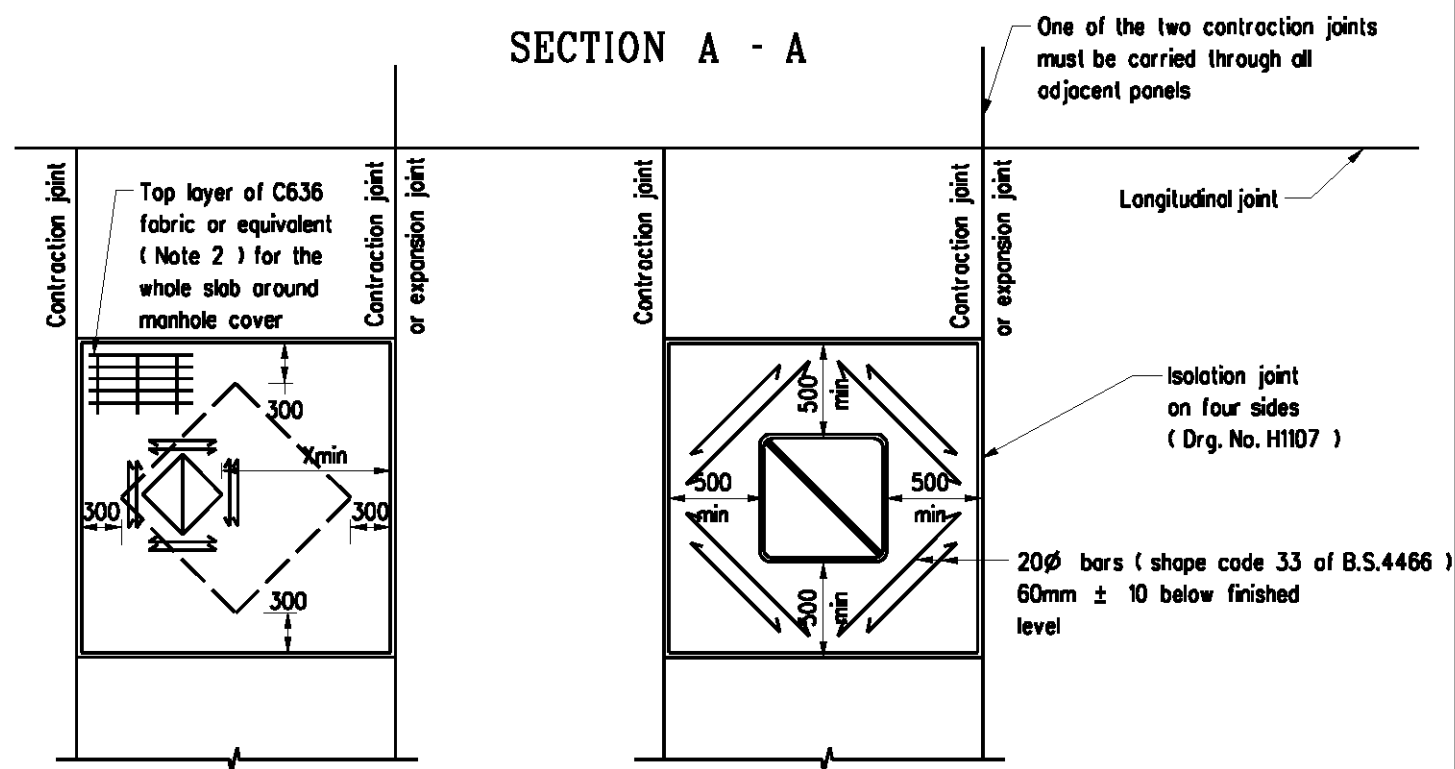

PLAN - FOR
NON-ORTHOGONAL LAYOUT

PLAN - FOR
ORTHOGONAL LAYOUT

Notes:

1. Case 1: Where only manhole shaft protrudes above formation level, $X_{min.} = 500$.
Case 2: Where manhole chamber protrudes above formation level, $X_{min.} = 300$ extended beyond edge of underground chamber.
2. Fabric reinforcement shall be required for non-orthogonal box-out slabs only.

	Former Drg. No. H1006A with general revision		June 94
REF.	REVISION	SIGNATURE	DATE

DETAILS OF CONC. ROAD SLAB
AROUND MANHOLES OR UTILITY
PITS (SHEET 2 OF 2)

HIGHWAYS DEPARTMENT

REFERENCE

DRAWING No.

CAD

SCALE

Diagrammatic

H 1112