



**ELEVATION WITH BEAM END RAMPED DOWN TO ANCHOR BLOCK**

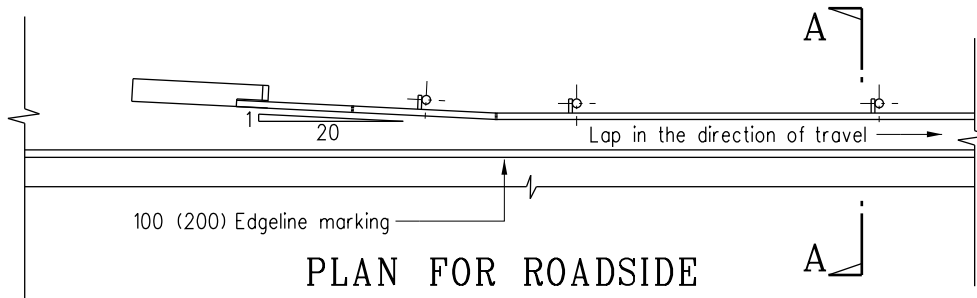

**PLAN FOR ROADSIDE WITH ANCHOR BLOCK AND HORIZONTAL FLARE**

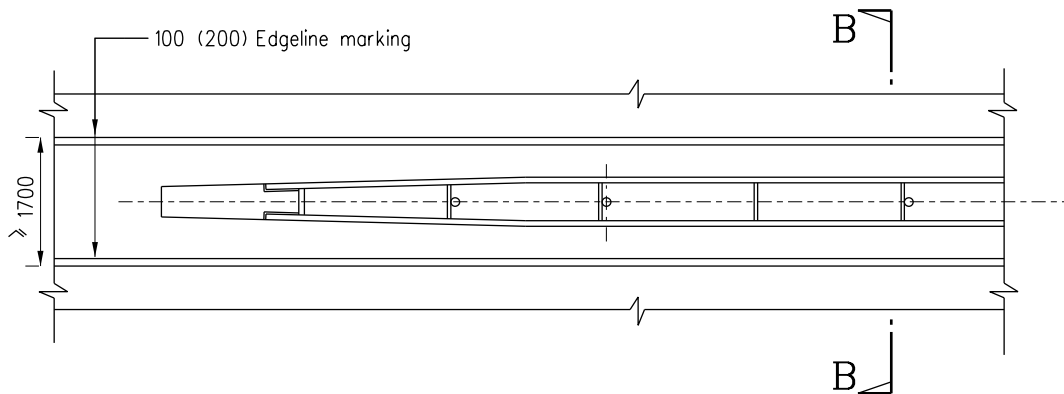

**PLAN FOR WIDE CENTRAL RESERVATION WITH ANCHOR BLOCK AND HORIZONTAL FLARE**

Notes:

1. All dimensions are in millimetres.
2. For Sections A-A & B-B see Drg. No. H2119.
3. Where the concrete footing is located in block paved footpath, the footing should be made of colour concrete with colour to tie with that of the paving blocks.

REF.	REVISION	SIGNATURE	DATE
D	General revision and note 2 amended	Original signed	Nov 16
C	Sheet number in title amended.	-	Jun 06
B	Note 3 amended	-	Dec 00
A	Note 3 added	-	Nov 99
	Former Drg. No. H2010/1 with general revision	-	Jun 94

**UNENSIONED BEAM BARRIERS  
WITH CONCRETE FOOTINGS  
FOR POST SPACING 4000mm  
(SHEET 1 OF 3)**

**HIGHWAYS DEPARTMENT**

REFERENCE

DRAWING No.

CAD

SCALE

1 : 100

**H 2117D**