



LOOP LAYOUT FOR STRATEGIC DETECTION

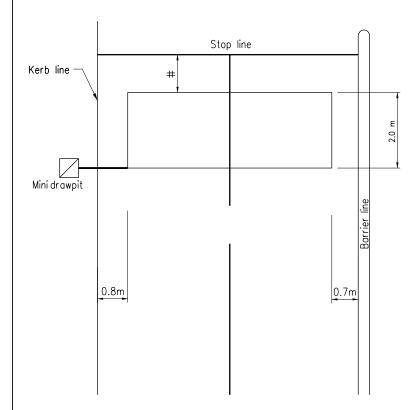



LOOP SLOT DETAIL

Loop cabling, filling of hot bitumen and cold-pour epoxy resin to be carried out by others.

Note

For installation of loop detector beneath porous surfacing, the installation and sealing should be done before laying the porous surfacing unless otherwise approved by HyD subject to special detailed design.

LOOP LAYOUT FOR TACTICAL DETECTION

#	Distance 1	1.0m	from	stop	line unless
	otherwise	state	d on	design	plan.

А	Title revised and note added	Original signed	Aug 15		
	New Issue	-	May 99		
REF.	REVISION	SIGNATURE	DATE		

TYPICAL SLOT FOR LOOP DETECTORS FOR ATC

HIGHWAYS DEPARTMENT

REFERENCE	DRAWING No.	CAD
Drg. ATC 998B	II 0404A	
SCALE	H Z181A	
Diagrammatic		