


**SECTION A-A**

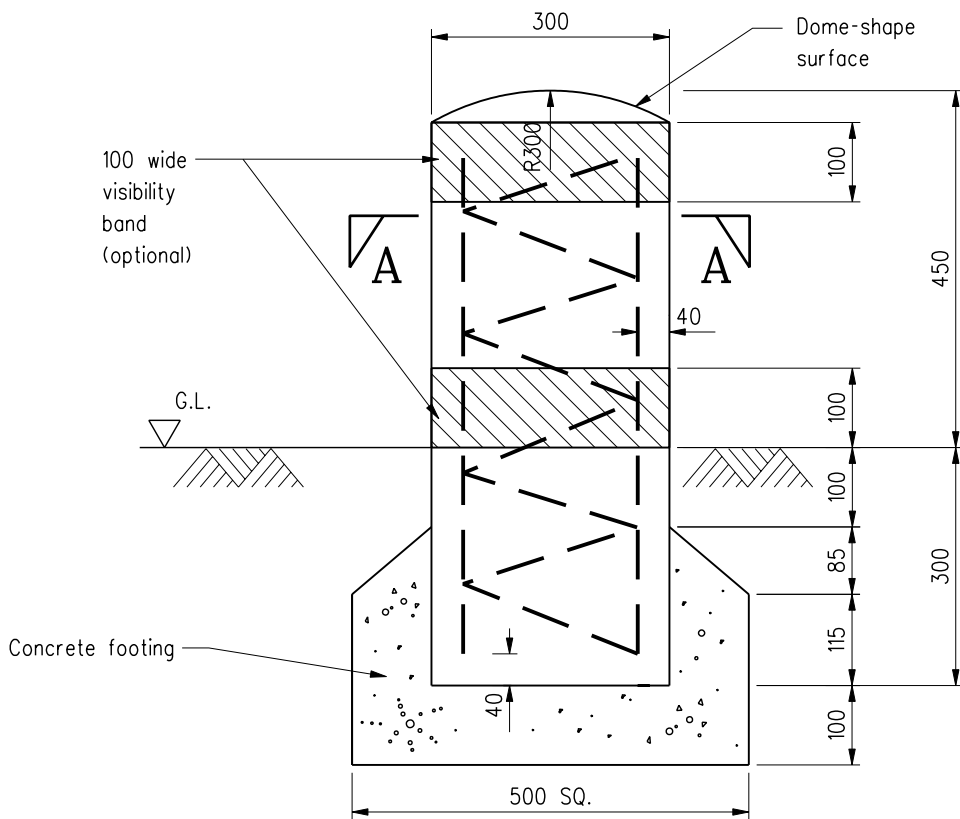

**SECTION - ELEVATION**

Notes:

1. All dimensions are in millimetres.
2. Bollard to be precast, reinforcement as shown.
3. All concrete shall be grade 20/20.
4. Smooth granolithic finishing with fine grade chips shall be applied to all exposed surfaces. Colour to engineer's specification.
5. Bollard may be painted. Colour to engineer's specification. If bollard colour contrasts distinctly with surrounding paving, visibility bands may be optional.
6. Bollard with 250mm diameter is optional.

	New Issue		Apr 05
REF.	REVISION	SIGNATURE	DATE

**SHORT PRECAST  
CONCRETE BOLLARD WITH  
COLOURED SMOOTH  
GRANOLITHIC FINISHING**

**HIGHWAYS DEPARTMENT**

REFERENCE	DRAWING No.	CAD
SCALE	H 2247	
1 : 10		