


SECTION A-A

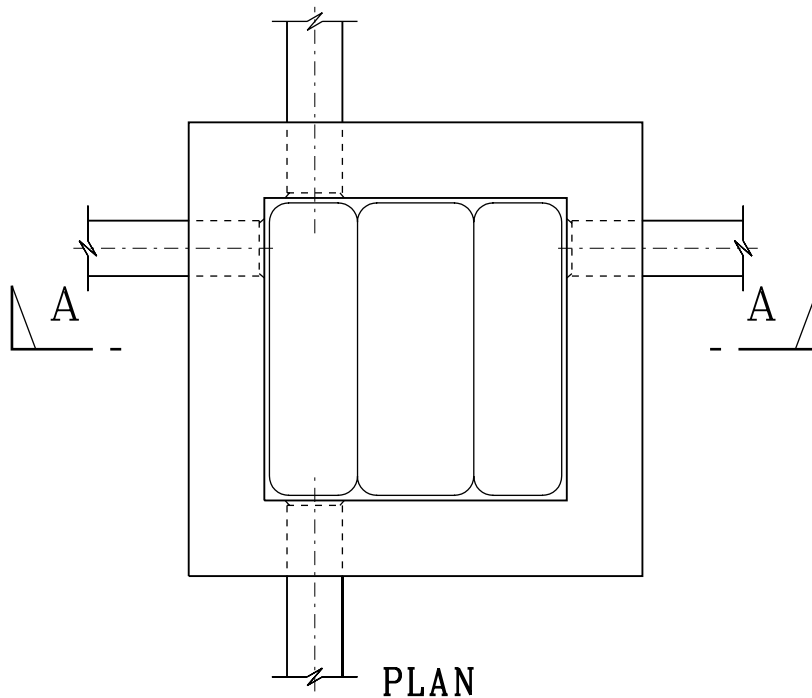

PLAN
(Cover and frame omitted)

Specification for the bags:

- a. Bags should be double layer polypropylene bags.
- b. Bag sizes should be max 450mm(W) by 850mm(L) and min 150mm(W) by 150mm(L).

Specification for Flame Retardant Grade Expanded Polystyrene (FR-EPS) beads

- a. Colour: white
- b. Grading: 2mm to 6mm in diameter
- c. Bulk density: 10-11 kg/m³

For bag installation and removal procedures refer to drawing no. H2258.

	New Issue		Jan 09
REF.	REVISION	SIGNATURE	DATE

**SPACE REDUCTION FOR
E & M MANHOLES
(SHEET 1 OF 2)**

HIGHWAYS DEPARTMENT

REFERENCE

DRAWING No.

CAD

SCALE

1 : 15

H 2257