


TRENCH EXCAVATION

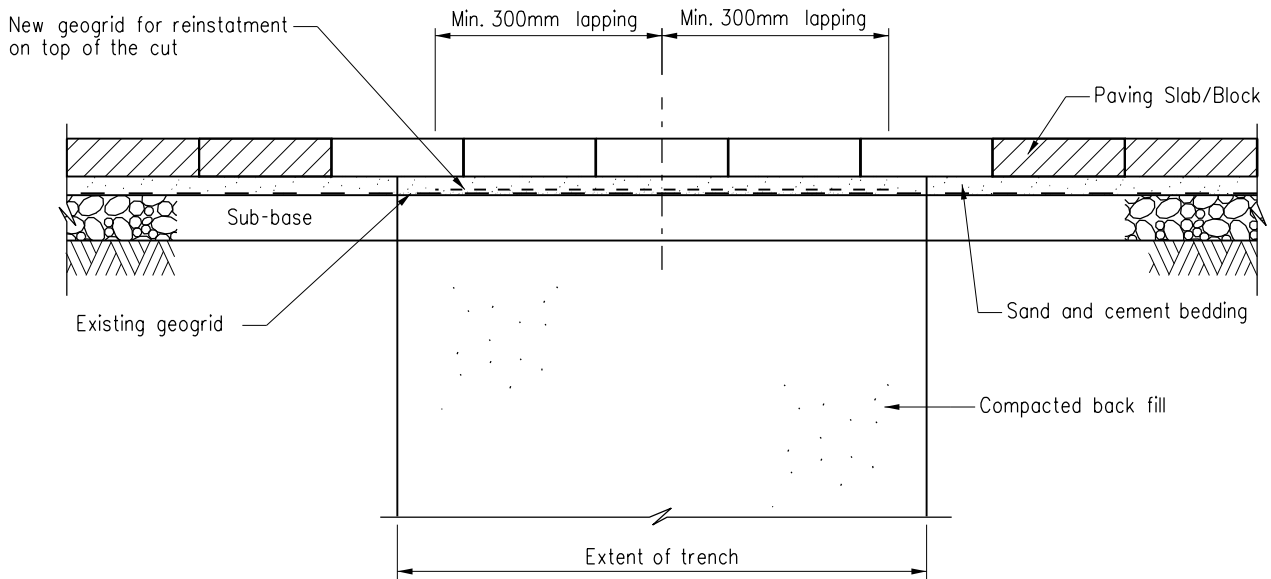

REINSTATEMENT OF FOOTWAY AFTER TRENCH EXCAVATION

Notes :

1. For other details, refer to the latest version of HyD Standard Drawing Nos. H 1131 and H 5136.
2. Minimum extent of reinstatement shall not be less than that required in the latest version of HyD Standard Drawing No. H 1131.
3. Geogrid shall be exposed, folded up and properly protected during trench excavation.

A	Title revised	Original signed	Oct 14
	New Issued	-	Aug 10
REF.	REVISION	SIGNATURE	DATE

PERMANENT REINSTATEMENT OF PAVEMENT - LAYING PAVING UNITS WITH GEOGRID

HIGHWAYS DEPARTMENT

REFERENCE

DRAWING No.

CAD

SCALE

Diagrammatic

H 5137A