



4 x Ø 13 HOLES FOR
M12 STAINLESS STEEL
OR CHROMED STEEL
ANCHOR BOLTS

ELEVATION

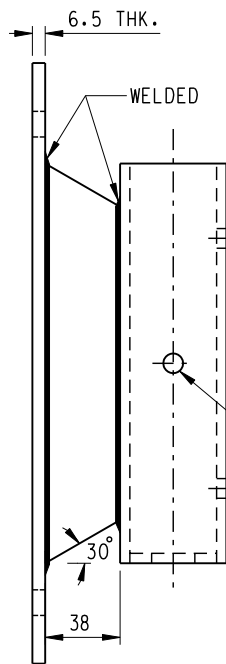

4 x Ø 10 TAPPED HOLES
FOR STAINLESS STEEL
OR CHROMED STEEL
ANTI-ROTATION SCREWS

END VIEW

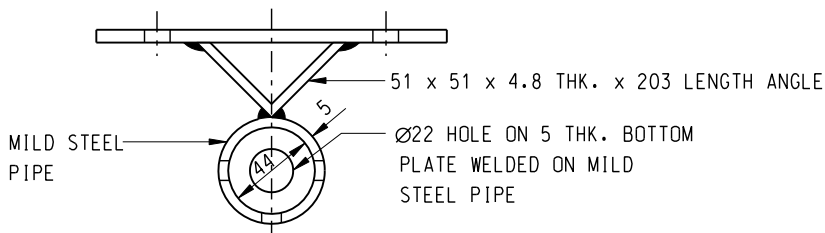

MILD STEEL
PIPE

51 x 51 x 4.8 THK. x 203 LENGTH ANGLE

Ø22 HOLE ON 5 THK. BOTTOM
PLATE WELDED ON MILD
STEEL PIPE

PLAN

STANDARD FIXING SOCKET

NOTES:

1. ALL DIMENSIONS ARE IN MILLIMETRES.
2. MATERIAL FOR THE BRACKET ASSEMBLY SHOULD BE OF MILD STEEL (GRADE 43) WITH HOT-DIP GALVANIZED TO BS729.
3. WELDING SHALL BE CARRIED OUT IN ACCORDANCE WITH BS5135.
4. THIS DRAWING SHOULD BE READ IN CONJUNCTION WITH DWG. NOS. HLSDML01-CL1008, 10 & 11.

D	General revision		Aug 14
C	General revision of notes		May 07
B	General revision of notes		Feb 06
A	General revision		Jun 02
	Former Drg. No. LSD2000-CL0029 with general revision		Dec 01
REF.	REVISION	SIGNATURE	DATE

TYPICAL INSTALLATION OF WALL
MOUNTED BRACKET FOR PUBLIC LIGHTING
(SHEET 2 OF 4)

HIGHWAYS DEPARTMENT
LIGHTING DIVISION

REFERENCE

DRAWING No.

CAD

SCALE

N.T.S.

HLSDML01-CL1009D