


ELEVATION

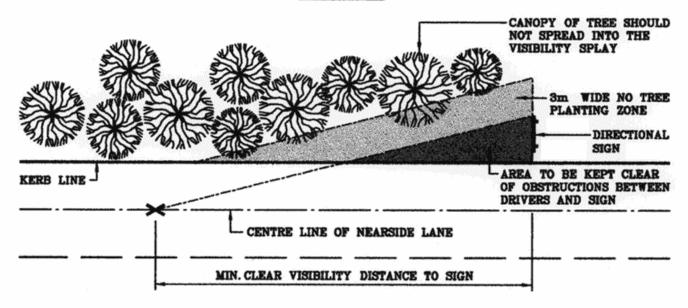

PLAN

NOTES:

1. ALL DIMENSIONS ARE IN MILLIMETRES UNLESS OTHERWISE STATED.

VISIBILITY SPLAY FOR DIRECTIONAL SIGNS

DIAGRAMMATIC

MINIMUM CLEAR VISIBILITY DISTANCES FOR DIRECTIONAL SIGNS

(EXTRACTED FROM TPDM V.3.3 TABLE 3.2.3.1)

ROAD TYPE	APPROX. 85 PERCENTILE SPEED OF CARS (km/h)	ADVANCE DIRECTION SIGN (m)	FINAL ADVANCE DIRECTION SIGN (m)	DIRECTION SIGN (m)	ROUTE CONFIRMATORY SIGN (m)
D EXPRESSWAY	80	180	180	100	100
2) TRUNK ROAD	70	135	135	100	100
3) PRIMARY DISTRIBUTOR ROAD AND RURAL ROADS A	60-70	135	135	100	100
4) DISTRICT DISTRIBUTOR ROAD AND RURAL ROADS B	50-60	100	-	75	-
5) OTHERS	50	75	_	50	-